

Glossmeter

Product Description

Amittari Glossmeter applies to Ink, paint, decoration materials, wood, marble, granite, polishing brick, tile measurement, paper and other non-metallic materials surface gloss test.

AG-106B




■ Measuring Angles: 60°

AG-126B



■ Measuring Angles: 20° & 60°

AG-1268B

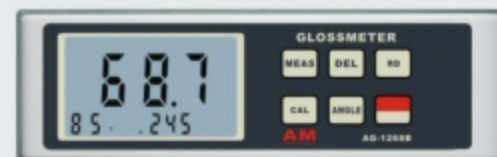

■ Measuring Angles: 20°, 60°, 85°

Product Feature

- * All intelligent design, rapid measurement.
- * Has voltage undervoltage indication function.
- * During operation will be issued a prompt tone.
- * Accurate measurement, good repetitiveness.
- * Use USB data output and RS-232 data output with connection PC.
- * Provide Bluetooth™ data output choice.



Product Parameter

Measuring Range	0.1 ~ 200 GU
Stability	±0.4GU/30Min
Error	< ± 1.2GU
Accuracy	±1.0 gloss unit (against reference standard)
Resolution	0.1 GU
Repeatability	±0.5 GU(0 ... 99.9)
Nvironment Temperature	0~40 °C
Relative Humidity	No more than 85%
Size	136x44x78 mm
Power Supply	Built-in 3.7V lithium Battery
Weight	350g (Including Batteries)

Product Accessories

Standard Accessories	Host
	Carrying Case
	Operation Manual
Optional Accessories	USB Data Output
	RS-232 Data Output
	Bluetooth™ Data Output