

### Description of the Sensor

The sensor PM.. with **integrated hx-processor** measures humidity by means of a humidity-dependant condenser. The capacitive Mela® humidity measuring element, produced using thinfilm technology, consists of a base plate, on which the electrodes are housed and a hygroscopic polymer layer above it. The hygroscopic polymer layer absorbs water molecules from the medium to be measured (air) or releases them, thereby altering the capacity of the condenser.

The humidity or temperature values measured are calculated in the exchangeable "PMU-V" measuring head, with the calibration values stored there, and communicated on to the following electronic transmitter components as calibrated digital measuring values.

The „PMU-V“ is calibrated and thus enables a replacement within seconds. Replaced measuring heads can be recalibrated in the factory.

The transmitter with the hx processor uses the values of the relative humidity and the temperature to calculate the dew point temperature, the enthalpy, the water content, the absolute humidity or the wet-bulb temperature, in accordance with the laws of physics. The values are emitted at two analogue outputs with the standardised signals 0...10VDC or 0 ...1VDC or 0...20mA or 4 ...20mA. The outputs can be configured differently and are defined using the software. Further measuring ranges on request.

The Mela® measuring element is protected by a filter and a basket guard. The sensors are designed for unpressurised systems, the measurement medium is non-aggressive air.

Please consult the application instructions for the sensing elements (product info sheet no. A 1) or check with the manufacturer for further information which you need to bear in mind when using humidity sensors with capacitive sensing elements.

<sup>1)</sup> Ex works. Depending on the specific range of application a regular recalibration of the sensor head (PMU-V) has to be effected. Higher accuracies on request.

<sup>2)</sup> The accuracy of the calculated values depends on both the operating point in accordance with the hx diagram and on the primary values measured.

<sup>3)</sup> See load diagram

This information is based on current knowledge and is intended to provide details of our products and their possible applications. It does not, therefore, act as a guarantee of specific properties of the products described or of their suitability for a particular application. It is our experience that the equipment may be used across a broad spectrum of applications under the most varied conditions and loads. We cannot appraise every individual case. Purchasers and/or users are responsible for checking the equipment for suitability for any particular application. Any existing industrial rights of preemption must be observed. The perfect quality of our products is guaranteed under our General Conditions of Sale. Issue : March 2008 valid until 31.12.2009 PM-V\_E. Subject to modifications, current version available at www.galltec.de. This issue supersedes all previous technical leaflets.

### Sensor for Humidity and Temperature with hx Processor PM-V

probe made of stainless steel  
 digital, exchangeable "Plug-and-Measure Unit" PMU-V  
 with outputs 0...10VDC, 0...1VDC, 0(4)...20mA  
 for direct output of various physical values

### Digital Measuring Head PMU-V

#### Humidity

measuring range ..... 0..100%rh  
 measuring accuracy 10...90%rh at 23°C ..... ±1.5%rh <sup>1)</sup>  
 at <10%rh >90%rh ..... ±2%rh  
 at <10°C >40°C ..... ±0.05%rh/K additional  
 resolution ..... 0.01%rh (read out)  
 response time at v=2m/s ..... < 10 s

#### Temperature

measuring range ..... -40...85°C  
 measuring accuracy ..... ±0.15 K @ 23°C  
 measuring element ..... (Pt1000 1/3DIN)  
 resolution ..... 0.01°C (readout)  
 ambient temperature ..... -40...85°C  
 protective system ..... IP30  
 measuring medium ... air, pressureless, non-aggressive, non-condense  
 output ..... ASCII (Galltec-Protocol)  
 housing ..... stainless steel

### Transmitter with hx Processor PMO...V

physical outputs

*There are respectively 2 physical values available at the output*

dew point temperature ..... 0...70°C <sup>2)</sup>  
 enthalpy ..... 0...80 kJ/kg <sup>2)</sup>  
 water content..... 0...100g/kg dry air <sup>2)</sup>  
 absolute humidity ..... 0...20g/m³ or 0...100g/m³ <sup>2)</sup>  
 wet-bulb temperature ..... -10...+50°C <sup>2)</sup>  
 relative humidity ..... 0...100%rh  
 temperature ..... -30...+70°C; 0...+50°C; 0...100°C

electrical outputs

voltage ..... 2x 0...10VDC, or 2x 0...1VDC  
 or current (only PM80V and PM100V) ..... 0(4)...20mA 4-wire

linearity tolerance ..... <0.25%

power supply:

PM80 + PM100: 0 ... 1V: 6 ... 30V DC / 24V AC ±10%

0 ... 10V: 15 ... 30V DC / 24V AC ±10%

0(4) ... 20mA: 15 ... 30V DC

PM15: 0 ... 1V: 6 ... 30V DC

0 ... 10V: 15 ... 30V DC

electromagnetic compatibility ..... ref. EN61326-1+A1+A2

min. load resistance for voltage output ..... 10 kOhm

consumption of electronics ..... <10 mA

load for current output ..... acc. diagram

permissible ambient temperature ..... -40...+85°C

at the housing ..... -10...60°C

max. air speed ..... 15m/s

minimum air speed across the measuring head

for output: 2 x 0...10 V, 0(4)...20mA ..... ≥1 m/s

1 x 0...10V, 2 x 0...1V ..... ≥0,5 m/s

housing PMO100V ..... ABS light grey

PMO80V ..... aluminium die-casting, varnished

PMO15V ..... stainless steel

protective system ..... IP64

probe material ..... stainless steel

mounting position ..... optional

contacting ..... connecting terminals 1.5mm² in the housing

PM15V length of connection cable ..... 1.5m

*"subject to technical modifications"*


## Type Survey

Type	Order No.	Physical output 1	Measuring value 1	Electrical output 1	Physical output 2	Measuring value 2	Electrical output 2
<b>PMU-V</b> "plug-and-measure unit"	630101023594	relative humidity	0...100%rh	ASCII (digital)	temperature	-30...+70°C (-40...+85°C)	ASCII (digital)
<b>PM80V</b> duct version alu housing  <b>0...20mA 4-wire</b>	740101023261	relative humidity	0...100%rh	0...20mA	temperature	-30...+70°C	0...20mA
	740101023161	relative humidity	0...100%rh	0...20mA	temperature	0...100°C	0...20mA
	740101023061	relative humidity	0...100%rh	0...20mA	temperature	0...+50°C	0...20mA
	740305023261	dew point temperature	0...70°C	0...20mA	temperature	-30...+70°C	0...20mA
	740410023261	enthalpy	0...80kJ/kg	0...20mA	temperature	-30...+70°C	0...20mA
	740515023261	water content	0...100g/kg dry air	0...20mA	temperature	-30...+70°C	0...20mA
	740621023261	absolute humidity	0...100g/m³	0...20mA	temperature	-30...+70°C	0...20mA
	740620023261	absolute humidity	0...20g/m³	0...20mA	temperature	-30...+70°C	0...20mA
	740833023261	wet-bulb temperature	-10...+50°C	0...20mA	temperature	-30...+70°C	0...20mA
<b>PM80V</b> duct version alu housing  <b>4...20mA 4-wire</b>	740101023271	relative humidity	0...100%rh	4...20mA	temperature	-30...+70°C	4...20mA
	740101023171	relative humidity	0...100%rh	4...20mA	temperature	0...100°C	4...20mA
	740101023071	relative humidity	0...100%rh	4...20mA	temperature	0...+50°C	4...20mA
	740305023271	dew point temperature	0...70°C	4...20mA	temperature	-30...+70°C	4...20mA
	740410023271	enthalpy	0...80kJ/kg	4...20mA	temperature	-30...+70°C	4...20mA
	740515023271	water content	0...100g/kg dry air	4...20mA	temperature	-30...+70°C	4...20mA
	740621023271	absolute humidity	0...100g/m³	4...20mA	temperature	-30...+70°C	4...20mA
	740620023271	absolute humidity	0...20g/m³	4...20mA	temperature	-30...+70°C	4...20mA
	740833023271	wet-bulb temperature	-10...+50°C	4...20mA	temperature	-30...+70°C	4...20mA
<b>PM100V</b> duct version ABS housing  <b>0...20mA 4-wire</b>	750101023261	relative humidity	0...100%rh	0...20mA	temperature	-30...+70°C	0...20mA
	750101023161	relative humidity	0...100%rh	0...20mA	temperature	0...100°C	0...20mA
	750101023061	relative humidity	0...100%rh	0...20mA	temperature	0...+50°C	0...20mA
	750305023261	dew point temperature	0...70°C	0...20mA	temperature	-30...+70°C	0...20mA
	750410023261	enthalpy	0...80kJ/kg	0...20mA	temperature	-30...+70°C	0...20mA
	750515023261	water content	0...100g/kg dry air	0...20mA	temperature	-30...+70°C	0...20mA
	750621023261	absolute humidity	0...100g/m³	0...20mA	temperature	-30...+70°C	0...20mA
	750620023261	absolute humidity	0...20g/m³	0...20mA	temperature	-30...+70°C	0...20mA
	750833023261	wet-bulb temperature	-10...+50°C	0...20mA	temperature	-30...+70°C	0...20mA
<b>PM100V</b> duct version ABS housing  <b>4...20mA 4-wire</b>	750101023271	relative humidity	0...100%rh	4...20mA	temperature	-30...+70°C	4...20mA
	750101023171	relative humidity	0...100%rh	4...20mA	temperature	0...100°C	4...20mA
	750101023071	relative humidity	0...100%rh	4...20mA	temperature	0...+50°C	4...20mA
	750305023271	dew point temperature	0...70°C	4...20mA	temperature	-30...+70°C	4...20mA
	750410023271	enthalpy	0...80kJ/kg	4...20mA	temperature	-30...+70°C	4...20mA
	750515023271	water content	0...100g/kg dry air	4...20mA	temperature	-30...+70°C	4...20mA
	750621023271	absolute humidity	0...100g/m³	4...20mA	temperature	-30...+70°C	4...20mA
	750620023271	absolute humidity	0...20g/m³	4...20mA	temperature	-30...+70°C	4...20mA
	750833023271	wet-bulb temperature	-10...+50°C	4...20mA	temperature	-30...+70°C	4...20mA


Type	Order No.	Physical output 1	Measuring value 1	Electrical output 1	Physical output 2	Measuring value 2	Electrical output 2
<b>PMU-V</b> "plug-and-measure unit"	630101023594	relative humidity	0...100%rh	ASCII (digital)	temperature	-30...70°C (-40...85°C)	ASCII (digital)
<b>PM80V</b> duct version alu housing  <b>0...10VDC</b>	740101023211	relative humidity	0...100%rh	0...10VDC	temperature	-30...+70°C	0...10VDC
	740101023111	relative humidity	0...100%rh	0...10VDC	temperature	0...100°C	0...10VDC
	740101023011	relative humidity	0...100%rh	0...10VDC	temperature	0...+50°C	0...10VDC
	740305023211	dew point temperature	0...70°C	0...10VDC	temperature	-30...+70°C	0...10VDC
	740410023211	enthalpy	0...80kJ/kg	0...10VDC	temperature	-30...+70°C	0...10VDC
	740515023211	water content	0...100g/kg dry air	0...10VDC	temperature	-30...+70°C	0...10VDC
	740621023211	absolute humidity	0...100g/m³	0...10VDC	temperature	-30...+70°C	0...10VDC
	740620023211	absolute humidity	0...20g/m³	0...10VDC	temperature	-30...+70°C	0...10VDC
	740833023211	wet-bulb temperature	-10...+50°C	0...10VDC	temperature	-30...+70°C	0...10VDC
<b>PM80V</b> duct version alu housing  <b>0...1VDC</b>	740101023221	relative humidity	0...100%rh	0...1VDC	temperature	-30...+70°C	0...1VDC
	740101023121	relative humidity	0...100%rh	0...1VDC	temperature	0...100°C	0...1VDC
	740101023021	relative humidity	0...100%rh	0...1VDC	temperature	0...+50°C	0...1VDC
	740305023221	dew point temperature	0...70°C	0...1VDC	temperature	-30...+70°C	0...1VDC
	740410023221	enthalpy	0...80kJ/kg	0...1VDC	temperature	-30...+70°C	0...1VDC
	740515023221	water content	0...100g/kg dry air	0...1VDC	temperature	-30...+70°C	0...1VDC
	740621023221	absolute humidity	0...100g/m³	0...1VDC	temperature	-30...+70°C	0...1VDC
	740620023221	absolute humidity	0...20g/m³	0...1VDC	temperature	-30...+70°C	0...1VDC
	740833023221	wet-bulb temperature	-10...+50°C	0...1VDC	temperature	-30...+70°C	0...1VDC
<b>PM100V</b> duct version ABS housing  <b>0...10VDC</b>	750101023211	relative humidity	0...100%rh	0...10VDC	temperature	-30...+70°C	0...10VDC
	750101023111	relative humidity	0...100%rh	0...10VDC	temperature	0...100°C	0...10VDC
	750101023011	relative humidity	0...100%rh	0...10VDC	temperature	0...+50°C	0...10VDC
	750305023211	dew point temperature	0...70°C	0...10VDC	temperature	-30...+70°C	0...10VDC
	750410023211	enthalpy	0...80kJ/kg	0...10VDC	temperature	-30...+70°C	0...10VDC
	750515023211	water content	0...100g/kg dry air	0...10VDC	temperature	-30...+70°C	0...10VDC
	750621023211	absolute humidity	0...100g/m³	0...10VDC	temperature	-30...+70°C	0...10VDC
	750620023211	absolute humidity	0...20g/m³	0...10VDC	temperature	-30...+70°C	0...10VDC
	750833023211	wet-bulb temperature	-10...+50°C	0...10VDC	temperature	-30...+70°C	0...10VDC
<b>PM100V</b> duct version ABS housing  <b>0...1VDC</b>	750101023221	relative humidity	0...100%rh	0...1VDC	temperature	-30...+70°C	0...1VDC
	750101023121	relative humidity	0...100%rh	0...1VDC	temperature	0...100°C	0...1VDC
	750101023021	relative humidity	0...100%rh	0...1VDC	temperature	0...+50°C	0...1VDC
	750305023221	dew point temperature	0...70°C	0...1VDC	temperature	-30...+70°C	0...1VDC
	750410023221	enthalpy	0...80kJ/kg	0...1VDC	temperature	-30...+70°C	0...1VDC
	750515023221	water content	0...100g/kg dry air	0...1VDC	temperature	-30...+70°C	0...1VDC
	750621023221	absolute humidity	0...100g/m³	0...1VDC	temperature	-30...+70°C	0...1VDC
	750620023221	absolute humidity	0...20g/m³	0...1VDC	temperature	-30...+70°C	0...1VDC
	750833023221	wet-bulb temperature	-10...+50°C	0...1VDC	temperature	-30...+70°C	0...1VDC

Type	Order No. (PM-key)	Physical output 1	Measuring value 1	Electrical output 1	Physical output 2	Measuring value 2	Electrical output 2
<b>PMU-V</b> "plug-and-measure unit"	630101023594	relative humidity	0...100%rh	ASCII (digital)	temperature	-30...70°C (-40...85°C)	ASCII (digital)
<b>PM15V</b> cable version  <b>0...10VDC</b>	730101023211	relative humidity	0...100%rh	0...10VDC	temperature	-30...+70°C	0...10VDC
	730101023111	relative humidity	0...100%rh	0...10VDC	temperature	0...100°C	0...10VDC
	730101023011	relative humidity	0...100%rh	0...10VDC	temperature	0...+50°C	0...10VDC
	730305023211	dew point temperature	0...70°C	0...10VDC	temperature	-30...+70°C	0...10VDC
	730410023211	enthalpy	0...80kJ/kg	0...10VDC	temperature	-30...+70°C	0...10VDC
	730515023211	water content	0...100g/kg dry air	0...10VDC	temperature	-30...+70°C	0...10VDC
	730621023211	absolute humidity	0...100g/m <sup>3</sup>	0...10VDC	temperature	-30...+70°C	0...10VDC
	730620023211	absolute humidity	0...20g/m <sup>3</sup>	0...10VDC	temperature	-30...+70°C	0...10VDC
	730833023211	wet-bulb temperature	-10...+50°C	0...10VDC	temperature	-30...+70°C	0...10VDC
<b>PM15V</b> cable version  <b>0...1VDC</b>	730101023221	relative humidity	0...100%rh	0...1VDC	temperature	-30...+70°C	0...1VDC
	730101023121	relative humidity	0...100%rh	0...1VDC	temperature	0...100°C	0...1VDC
	730101023021	relative humidity	0...100%rh	0...1VDC	temperature	0...+50°C	0...1VDC
	730305023221	dew point temperature	0...70°C	0...1VDC	temperature	-30...+70°C	0...1VDC
	730410023221	enthalpy	0...80kJ/kg	0...1VDC	temperature	-30...+70°C	0...1VDC
	730515023221	water content	0...100g/kg dry air	0...1VDC	temperature	-30...+70°C	0...1VDC
	730621023221	absolute humidity	0...100g/m <sup>3</sup>	0...1VDC	temperature	-30...+70°C	0...1VDC
	730620023221	absolute humidity	0...20g/m <sup>3</sup>	0...1VDC	temperature	-30...+70°C	0...1VDC
	730833023221	wet-bulb temperature	-10...+50°C	0...1VDC	temperature	-30...+70°C	0...1VDC

**Accuracy of humidity in %rh (type.) @ 23°C**

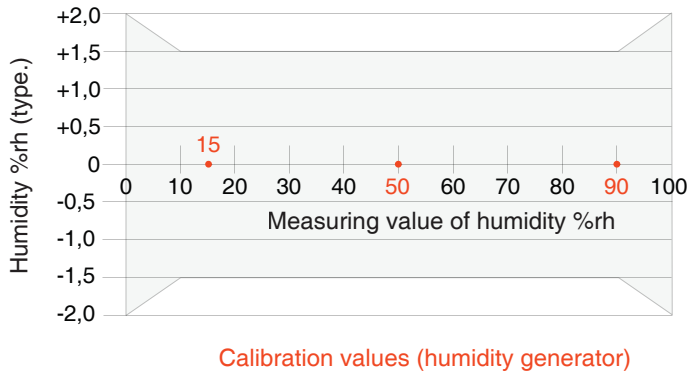


**Load for 0(4)...20mA current version**

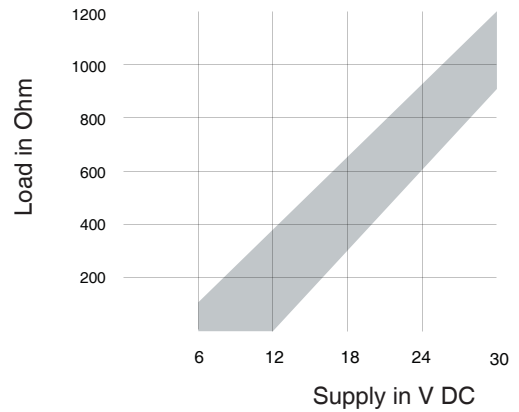

**Connection diagrams**


**Connection diagram PM80V, PM100V**

Voltage output 0...10VDC or 0...1VDC



negative poles are bridged

Current output 0...20mA or 4...20mA (4-wire)




positive poles are bridged

**Voltage output 2 x 0...1VDC**



⊖ = Common (not galvanically separated)

**Voltage output 2 x 0...10VDC**

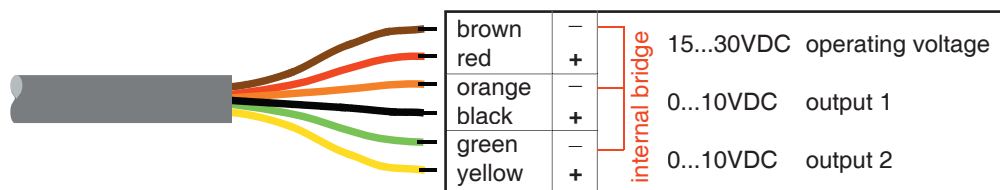

⊖ = Common (not galvanically separated)

<sup>3)</sup> see load diagram

